



Power Factor Characteristic

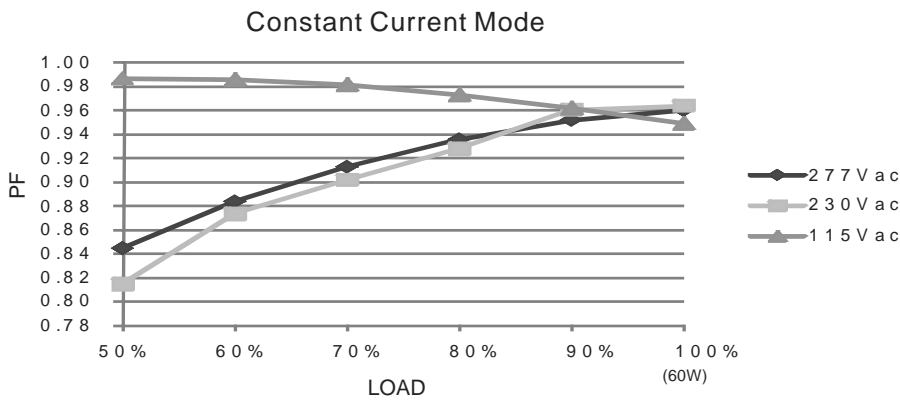


EFFICIENCY vs LOAD (48V Model)

CLG-60 series possess superior working efficiency that up to 89% can be reached in field applications.

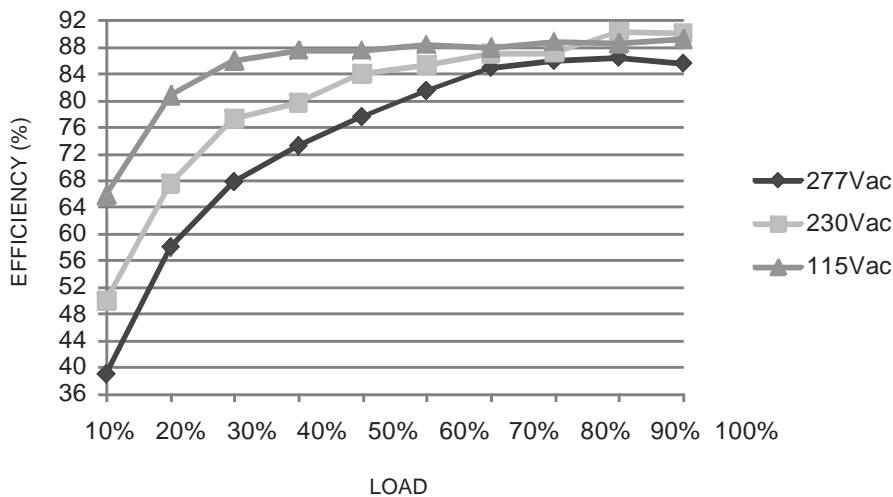

DRIVING METHODS OF LED MODULE

This LED power supply is suggested to work in constant current mode area (CC) to drive the LEDs.

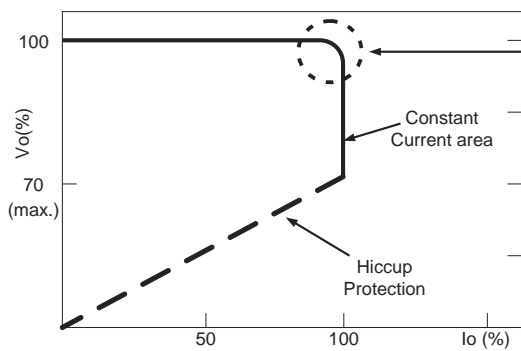

Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems. Should there be any compatibility issues, please contact MEAN WELL.

60W Single Output LED Power Supply

€ 7 . :5 ' ; < =
 € >) . /5
 € # '& ?<@
 € / ,4& :. :. . ' :.
 € ' .
 € 1/8+ '
 € %
 € / 6/4
 €

Protection type : Shut down o/p voltage, re-power on to recover

20 ~ 95% RH non-condensing
 -40 ~ +80 , 10 ~ 95% RH
 ±0.03%/ (0 ~ 50)
 10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes

495.7K hrs min. MIL-HDBK-217F (25)
 195.6*61.5*38.8mm (L*W*H)
 0.86Kg; 16pcs/14.8Kg/0.54CUFT

! "#\$ % & ' (%)% % & !*+
 * - ' , % . ' / & 0 & &
 / (- 1 1 2 "3 # -4 5 63- "-763(
 8 & % & % % & 9 4 3" % &
 + - ' 63- ")9 3" - . & '